

Steel interior door „Teckentrup Object“



Text example

Compile and tender according to requirements.
Please refer to technical data below for respective details.
Updated 1st June 2015

Position	No. of pieces	Item	Unit price €	Total price €
		Door element „Teckentrup Object“ can be used DIN right or DIN left. Door leaf made of hot-dip galvanized thin metal sheet, 40 mm thick, rebated on 3 sides. Tubular core bonded with the door shells over the entire surface. Galvanized and prime coated frame with 3-sided seal. Tumbler lock (Bb)/profile cylinder lock. Black round handle set „Teckentrup Object“ or equivalent.		

Technical data

Product:	Interior door „Teckentrup Object“ Climate class III Stress group S		
Dimensions:	Width:	625 - 1250 mm	
	Height:	1875 - 2250 mm	
Type of handing:	DIN right or DIN left		
Door leaf:	Rebated on 3 sides made of hot-dip galvanized thin metal sheet (thick rebate) Insulation: Tubular core bonded with the door shells over the entire surface Door leaf thickness: 40 mm		
Frame:	Frame element galvanized and powder coated, Traffic white similar to RAL 9016, with 3-sided seal, welded-on wall anchor plugs		
Surface:	<ul style="list-style-type: none"> Galvanized door leaf or galvanized/powder coated, similar to RAL 9016 (Traffic white) Galvanized and powder coated in: Sepia brown, Moss green, Reed green, Pigeon blue, Carmine and Pure white Wood designs: Light oak, White ash, Beech natural, Classic oak and Cherry design 		
Fittings:	<ul style="list-style-type: none"> 3-piece hinges, V8026 (pair) Lock prepared for profile cylinder with latch lever and tumbler insert (Bb) round handle set 		
Special equipment:	<ul style="list-style-type: none"> Bathroom lock / WC lock Profile cylinder with 3 keys Spyhole without viewer Spyhole with micro door viewer Letter box with flap/ Letter box cover Aluminium ventilation grille/ Steel transformer grille Retractable bottom seal Door leaf prepared for rose escutcheon Door leaf prepared for top door closer Top door closer Frame without floor recess Full tubular core/Multi-layer tubular core on request RAL of your choice 		

Glazing:

Door leaf	Glazing strip version	Glazing
Galvanized		
Galvanized and powder coated Traffic white	- With E6 anodized LM strips (natural anodized) - Round glazing, Ø 300 mm (stainless steelglass-holding strip)	Wire patterned glass up to 6 mm
Colour		
Wood designs		

Standard sizes:

Ordering dimensions/ Modular dimensions	Pane size L1	Pane size L2	Pane size L3
width x height			
625 x 2000	245 x 360	245 x 960	245 x 1335
750 x 1875	370 x 360	370 x 960	370 x 1210
	2000	360	960
	2125	360	960
875 x 1875	495 x 360	495 x 960	495 x 1210
	2000	360	960
	2125	360	960
1000 x 1875	620 x 360	620 x 960	620 x 1210
	2000	360	960
	2125	360	960

Special sizes: From 625 x 2000 mm to 1250 x 2250 mm



Special equipment (only for full leaf):



- **Sound insulation** in acc. with DIN EN 20140/717 Part 1
RW 25dB with retractable bottom seal

Interior door „Teckentrup Object“ double leaf
Dimensions 1500 x 1875 mm to 2500 x 2250 mm

Steel interior door „Teckentrup Objekt”

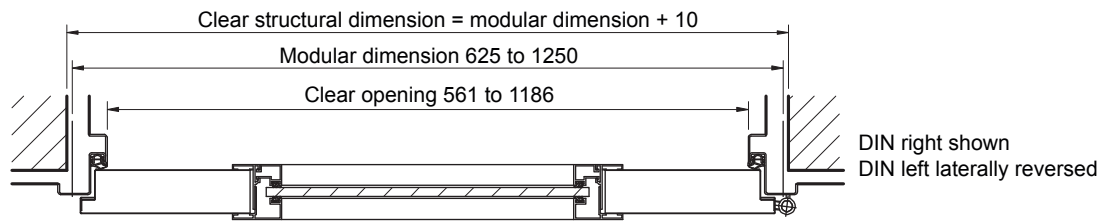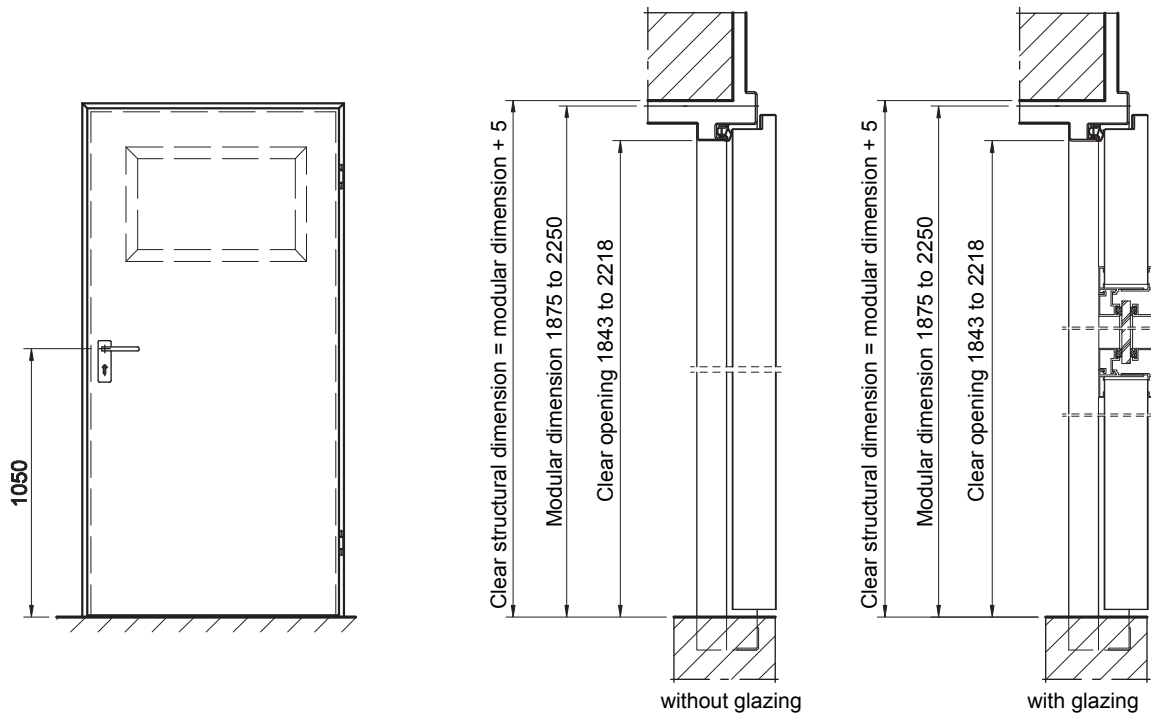

Floor connections:

Image 1: without floor recess
Image 2: with bottom / seal



Installation in masonry/ concrete walls

